


# Flexible insulated budget light duct

# FIBLD



## Dimensions

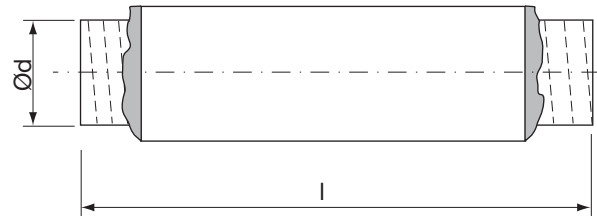

## Description

Multiple layer inner core insulated with fibreglass, covered by a multiple layer outer jacket.


## Technical data

Duct materials:

inner wall (core).....	Multiple layers aluminium/ polyester supported by a bronze coated wire helix
insulation.....	25 mm fibreglass
outer wall (jacket).....	Multiple layers aluminium/ polyester
Temperature range .....	-30 to +125 °C
Standard length.....	10 m, other lengths on request
Packing .....	Individual box – 1 m

Ød nom	O πd m	A πd <sup>2</sup> /4 m <sup>2</sup>	l mm	Max. pressure Pa
80	0,251	0,005	10000	+3000
100	0,320	0,008	10000	+3000
125	0,399	0,013	10000	+3000
150	0,478	0,018	10000	+3000
160	0,509	0,015	10000	+3000
180	0,565	0,025	10000	+3000
200	0,638	0,032	10000	+3000
315	0,990	0,078	10000	+3000

## Ordering example

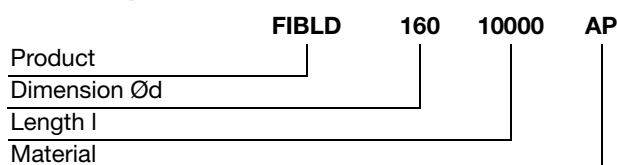

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18