

**AREA:** PRINCIPAL  
**EMPRESA** EBIR ILUMINACIÓN, S.L.  
**USUARIO** 320-JOAQUÍN AGUILAR HUEZO  
**FECHA IMPRESIÓN** 19/02/2015



**TITULO DE INFORME:** RE-33014 FICHA TECNICA VENTA EBIR APLIQUES roca

**DESCRIPCIÓN INFORME** INFORME DE ETIQUETAS DE ARTÍCULOS SIMPLE

**FILTROS**

Artículo: E26277CI  
Tipo: <Todos>  
Clase: <Todos>  
Grupo: <Todos>  
Almacén: 0


**ORDENADO POR:**

Ordenado por ARTÍCULO (Ascendente)

MODEL: APLIQUE ANDREA S-3 CR LED CII IP44 1X3W 284MM C/M

CODE: E26277CI

DIMENSIONS OF PRODUCT:

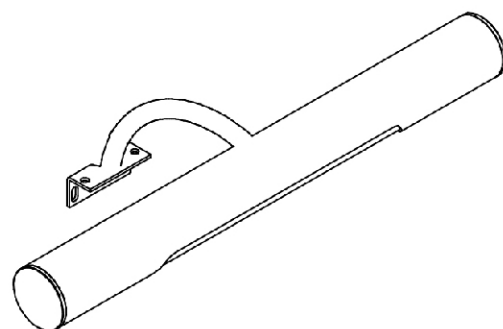

CRITERIA OF EXTERIOR ASPECT(RE-33033):  
QUALITY OF PRODUCT:

		QUALITY SYMBOLS	
1- Fixing system:	▽		
2- Top side:	▽	▽	NORMAL
3- Front side:	▽▽	▽▽	GOOD
4- Bottom side:	▽▽	▽▽▽	VERY GOOD

MATERIALS AND DECORATIONS:

Metal: Aluminium Finish: Aluminium/Silver

FIXING TO SURFACE:

Wooden frame

BOXING

INSIDE	UNITS	MEASUREMENT	WEIGHT "kg"	VOLUME "m3"	COMPONENTS
Box	1	0 0 0	0,29	0,001414	1 Applied 1 Connection box IP44 1 Bag with screws 1 Instruction sheet
OUTSIDE					
Lot box	0	0 x 0 x 0	8,10	0,000000	20 Individual boxes by batch
Palet	0	0 x 0 x 0	304	0,000000	35 Industrial boxes x 20 individual

MANUFACTURING REQUIREMENTS:

Minimum of production: 500 Un.

Delivery time: 55 Working days




SPARE

E17843-Connexion box; E26055EI-UTE

ELECTRIC POWER


Nominal voltage	Power	Lamp holder	Lamp	Connexion to network
230V-50Hz	MAX 1X3W	LED		Using connection box IP44 2P

STANDARIZATION AND CLASSIFICATION

 UNE-EN 60598		IP44 	 0,10m
--	---	--	--

certificate n°
WTZ15F0122542S

ILLUMINANCE AND LIGHT SOURCE

Light temp	life bulb	Lux	Direction of
5700K	25000h	1) 505	
±300K		2) 225	
		3) 60	

ECO DESIGN	
	Ecological impact value
	Low
	0,667